

RC 100 SERIES ROTARY CUTTER




The game has changed and the stakes have been raised! Dirt Dog is proud to introduce the RC series rotary cutter line. Developed and built in Commerce, Georgia, this trend-setting line of standard duty rotary cutters is available in 4-foot, 5-foot and 6-foot models. The RC line from Dirt Dog is designed with tip speeds suitable to provide a clean cut and nice finish in light to heavy grass conditions while also being durable enough to mow through light brush up to 1-1/2 inches in diameter.



QUICK HITCH COMPATIBLE



SEGMENTED REAR TIRE WITH REPLACEABLE BUSHINGS

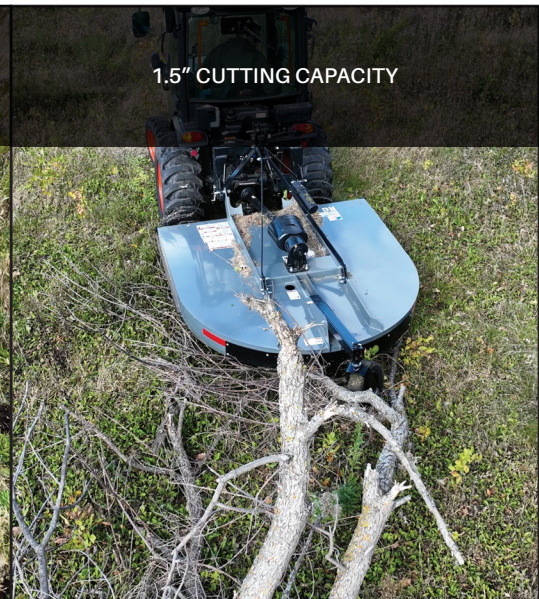

1.5" CUTTING CAPACITY





Mower Attachments



DIRT DOG

Take a Picture of This QR Code With Your Smart Phone to See it in Action

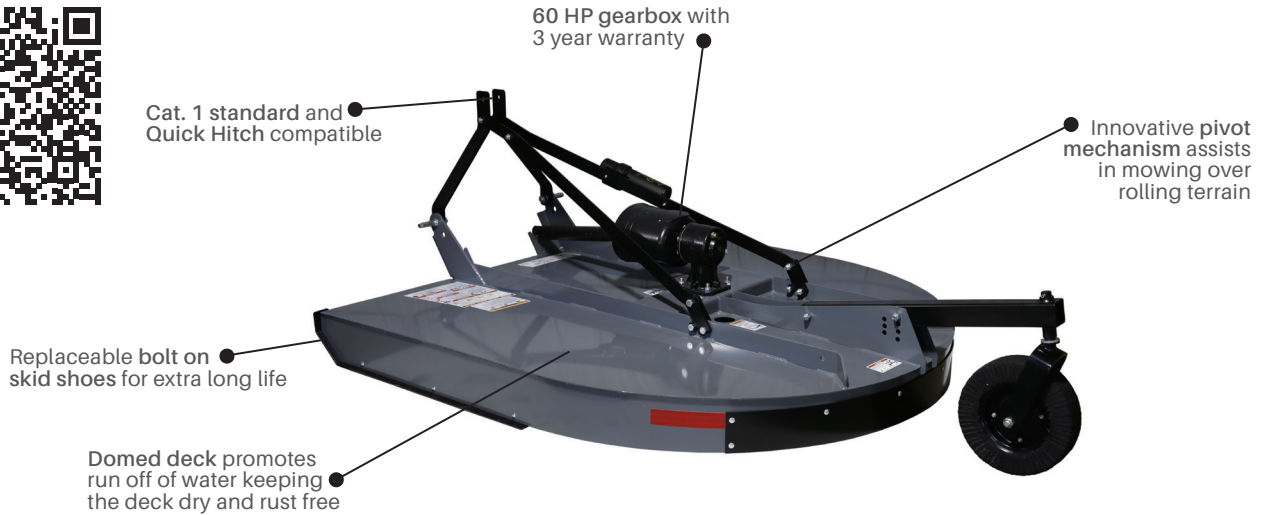

FEATURES & BENEFITS

- 10 gauge deck has a rounded rear radius for strength and domed deck to eliminate water pooling
- Front and rear replaceable shielding for optimal protection from debris
- Built in shear bolt (SB) or slip clutch (CL) protection depending on model
- Smooth deck

SPECIFICATIONS / OPTIONS

Model	RC104	RC105	RC106
Weight	420 lbs.	508 lbs.	600 lbs.
Cutting Width	4 feet	5 feet	6 feet
Minimum Cut Height	2"	2"	2"
Hitch Type	Cat. 1 & Cat. 1 Quick Hitch	Cat. 1 & Cat. 1 Quick Hitch	Cat. 1 & Cat. 1 Quick Hitch
Cut Capacity	Grass, weeds, light brush (1.5" diam.)	Grass, weeds, light brush (1.5" diam.)	Grass, weeds, light brush (1.5" diam.)
Deck Material Thickness	10 Gauge	10 Gauge	10 Gauge
Sideband Thickness	10 Gauge	10 Gauge	10 Gauge
Deck Height	7"	7"	7"
Gearbox HP Rating	60 hp	60 hp	60 hp
Gearbox Ratio	1:1.93	1:1.93	1:1.47
Tractor PTO Speed	540 RPM	540 RPM	540 RPM
Tractor Horsepower Recommendation	18-40 hp	20-60 hp	20-60 hp
Drive-line	ASAE/ Category 3	ASAE/ Category 3	ASAE/ Category 3
Drive-line Protection	Shear bolt or slip clutch	Shear bolt or slip clutch	Shear bolt or slip clutch
Stump Jumper	Round pan, 10 ga, 22" diameter	Round pan, 10 ga, 22" diameter	Round pan, 10 ga, 22" diameter
Blades	1/2" x 3" Hardened alloy steel, free swinging	1/2" x 3" Hardened alloy steel, free swinging	1/2" x 3" Hardened alloy steel, free swinging
Blade Tip Speed	12,841 Ft/Min	16,120 Ft/Min	14,359 Ft/Min
Blade Bolts	Keyed with hardened lock washer and nut	Keyed with hardened lock washer and nut	Keyed with hardened lock washer and nut
Skids	1/4", Bolt-on, replaceable	1/4", Bolt-on, replaceable	1/4", Bolt-on, replaceable
Tailwheel	4" X 15" Laminated tire	4" X 15" Laminated tire	4" X 15" Laminated tire
Safety Guards	Rubber front, metal rear	Rubber front, metal rear	Rubber front, metal rear
Warranty	2 Year Warranty	2 Year Warranty	2 Year Warranty

Available Colors:

