



REAR BLADE 25 & 35 SERIES

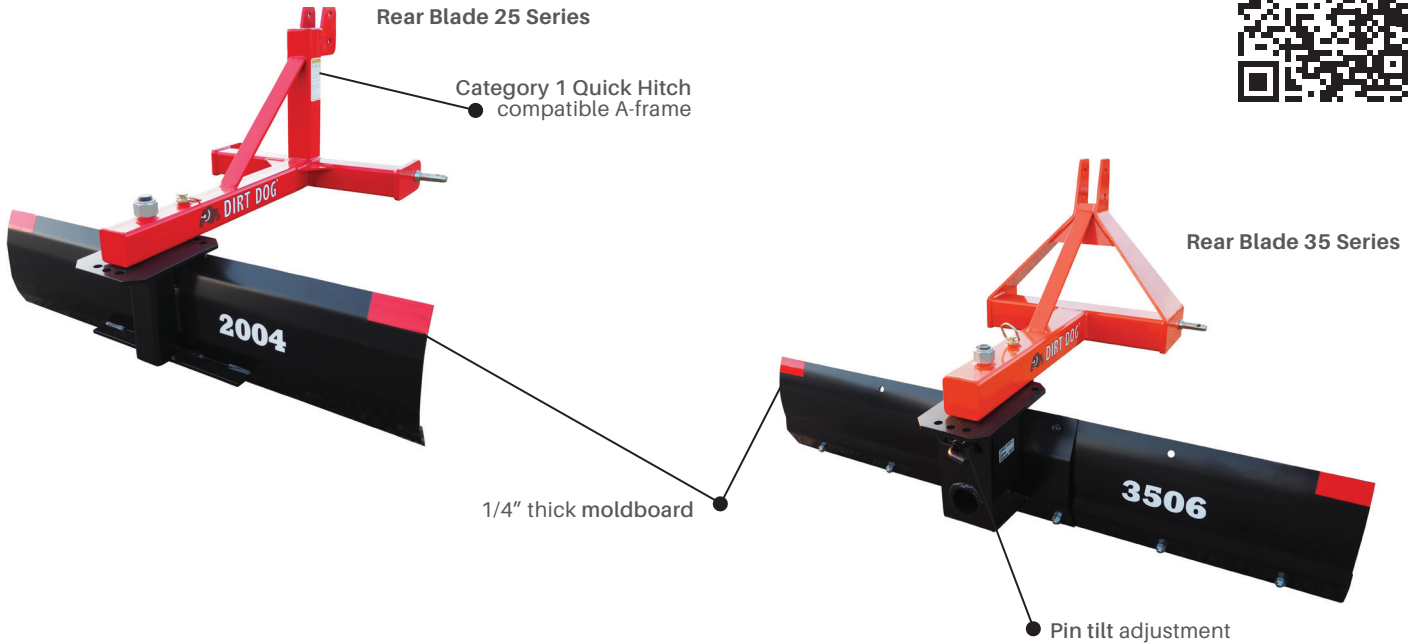

Take a Picture of This QR Code With Your Smart Phone to See it in Action



FEATURES & BENEFITS

- Any landscaping job, from ditching to snow removal can be handled
- Adjustment angles 30° forward and 15° reverse
- 5 forward angles and 3 reverse angles

SPECIFICATIONS / OPTIONS

Models	Rear Blade 25 Series	Rear Blade 35 Series
Overall Height	34 1/2"	39"
Overall Width	4', 5' & 6'	4', 5', 6' & 7'
Overall Depth	36"	37"
Moldboard Height	12 1/4"	14"
Weight	136 lbs (4') / 150 lbs (5') / 164 lbs (6')	260 lbs (4 ft) / 290 lbs (5 ft) / 310 lbs (6 ft) / 340 lbs (7 ft)
Tilt Adjustment	N/A	15°
Offset Adjustment	N/A	12"
Angle Adjustment (Forward/ Reverse)	30° - 15°	30° - 15°
Adjustment Method	Manual	Manual
Lower Hitch Pin Height	15"	19 1/2"
Horse Power (2wd - 4 wd)	24 - 20	35 - 30
Hitch	Cat. 1 Quick Hitch	Cat. 1 Quick Hitch
Cutting Edge	3/8" X 3" Weld On	1/2" X 6" Bolt on replaceable and reversible
Skid Shoes	N/A	Optional
King Pin	1 1/4" Grade 8	1 1/4" Grade 8

Available Colors:






REAR BLADE 50 & 70 SERIES



Take a Picture of This QR Code With Your Smart Phone to See it in Action

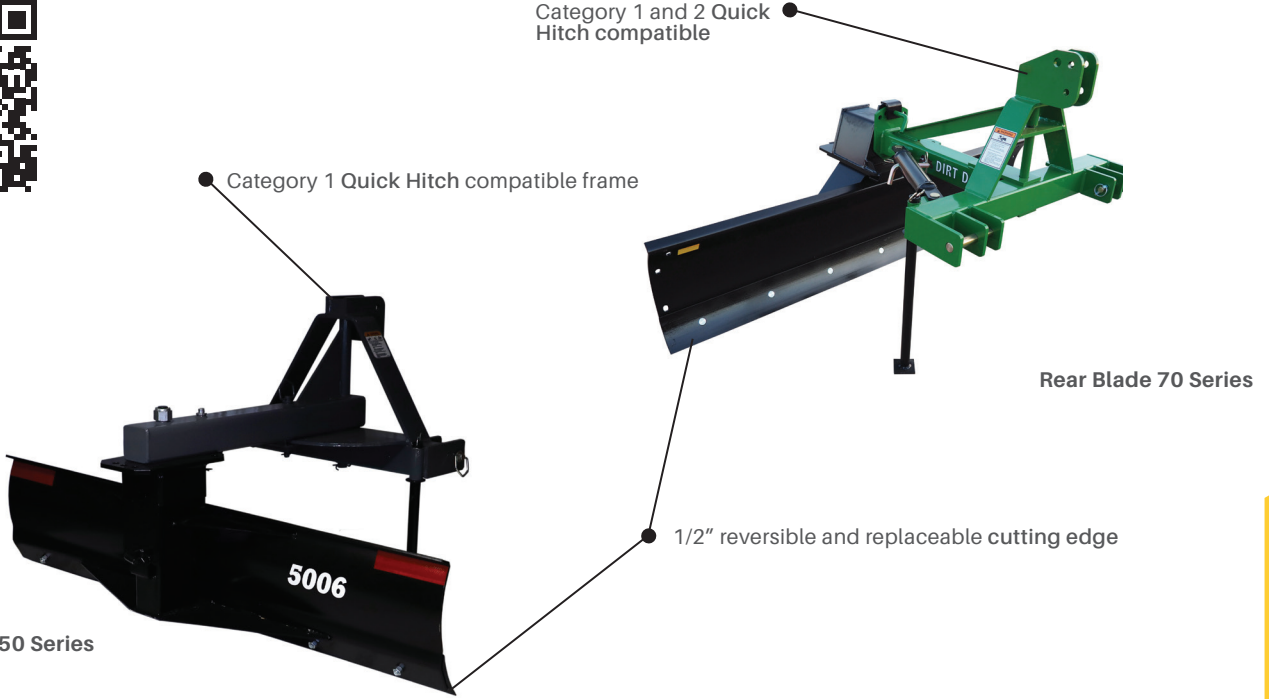

TRACTOR

FEATURES & BENEFITS

- Fully welded A-frame
- Double strap hitch
- 5/16" thick moldboard
- Reversible and replaceable cutting edge
- Quick Hitch compatible

SPECIFICATIONS / OPTIONS

Models	Rear Blade 50 Series	Rear Blade 70 Series
Overall Height	38"	46"
Overall Width	6' & 7'	6', 7' & 8'
Overall Depth	44 1/2"	49 1/2"
Moldboard Height	15 1/2"	19"
Weight	403 lbs (6') / 430 lbs (7')	510 lbs (6') / 538 lbs (7') / 572 lbs (8')
Tilt Adjustment	15°	30°
Offset Adjustment	16"	18"
Angle Adjustment (Forward/ Reverse)	30° - 15°	45°
Adjustment Method	Manual	Manual or Hydraulic
Lower Hitch Pin Height	18 1/2"	26 1/2"
Horse Power (2wd - 4 wd)	50 - 40	70 - 55
Hitch	Cat. 1 Quick Hitch	Cat. 1 & 2 Quick Hitch
Cutting Edge	1/2" X 6" bolt on reversible and replaceable	1/2" X 6" bolt on reversible and replaceable
Skid Shoes	Optional	Optional
King Pin	1 1/4" Grade 8	1 1/4" Grade 8
Parking Stand	Standard	Standard

Available Colors:






REAR BLADE 91 SERIES



Take a Picture of This QR Code With Your Smart Phone to See it in Action

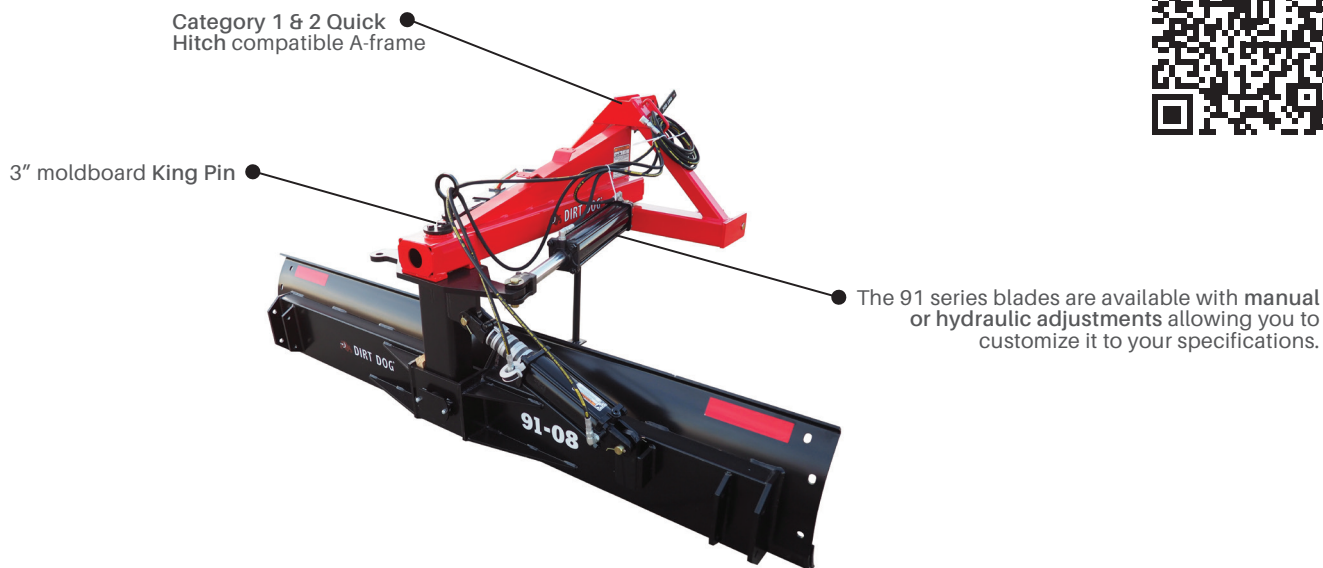

FEATURES & BENEFITS

- 3" moldboard King Pin
- Moldboard 5/16" x 19" reinforced
- Category 1 and 2 Quick Hitch compatible A-frame

SPECIFICATIONS / OPTIONS

Models	Rear Blade 91 Series
Overall Height	44 5/8"
Overall Width	7' & 8'
Overall Depth	53 5/16"
Moldboard Height	19"
Weight	807 lbs (7'w) / 827 lbs (8')
Tilt Adjustment	15°
Offset Adjustment	20"
Angle Adjustment (Forward/ Reverse)	45°
Adjustment Method	Manual or hydraulic
Lower Hitch Pin Height	25 1/4"
Horse Power (2wd - 4 wd)	90 - 70
Hitch	Cat. 1 & 2 Quick Hitch
Cutting Edge	1/2" X 6" Bolt-on replaceable and reversible
Skid Shoes	Optional
King Pin	3"
Parking Stand	Standard

Available Colors:






REAR BLADE 141 SERIES



Take a Picture of This QR Code With Your Smart Phone to See it in Action

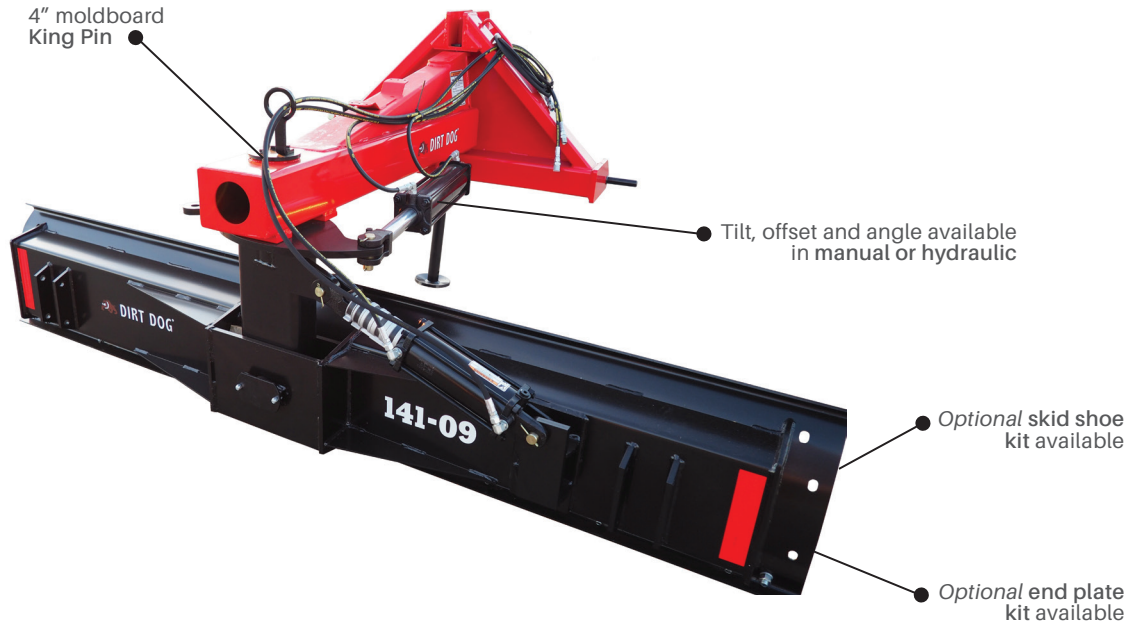

TRACTOR

FEATURES & BENEFITS

- Category 2 and 3 Quick Hitch compatible
- 4" moldboard king pin
- Tilt, offset and angle available in manual or hydraulic
- Reinforced moldboard available in 8 or 9 ft widths
- Optional skid shoe kit available
- Optional end plate kit Available

SPECIFICATIONS / OPTIONS

Models	Rear Blade 141-08 Series	Rear Blade 141-09 Series
Overall Height	48"	48"
Overall Width	96"	108"
Overall Depth	64 3/16"	64 3/16"
Moldboard Height	19"	19"
Weight	1145 lbs	1170 lbs
Tilt Adjustment	15°	15°
Offset Adjustment	35"	35"
Angle Adjustment (Forward - Reverse)	45°	45°
Adjustment Method	Manual or hydraulic	Manual or hydraulic
Lower Hitch Pin Height	24 7/16"	24 7/16"
Horse Power (2wd-4wd)	141 - 110	141 - 110
Hitch	Cat. 2 & 3 Quick Hitch	Cat. 2 & 3 Quick Hitch
Cutting Edge	1/2" X 6" Bolt-on reversible & replaceable	1/2" X 6" Bolt-on reversible & replaceable
Skid Shoes	Optional	Optional
King Pin	4"	4"

Available Colors:





DIRT DOG

REAR BLADE 181 SERIES



Take a Picture of This QR Code With Your Smart Phone to See it in Action



FEATURES & BENEFITS

- Category 2 and 3 Quick Hitch compatible A-frame
- 5" moldboard king pin
- Tilt, offset and angle available in manual or hydraulic
- Reinforced moldboard available in 9 or 10 ft widths
- Optional skid shoe kit available
- Optional end plate kit available

SPECIFICATIONS / OPTIONS

Models	Rear Blade 181-09 Series	Rear Blade 181-10 Series
Overall Height	46 3/8"	46 3/8"
Overall Width	108"	120"
Overall Depth	71 1/4"	71 1/4"
Moldboard Height	19"	19"
Weight	1586 lbs	1613 lbs
Tilt Adjustment	15°	15°
Offset Adjustment	39"	39"
Angle Adjustment (Forward/ Reverse)	45°	45°
Lower Hitch Pin Height	22 7/8"	22 7/8"
Horse Power (2wd - 4 wd)	180 - 140	180 - 140
Hitch	Cat. 2 & 3 Quick Hitch	Cat. 2 & 3 Quick Hitch
Cutting Edge	1/2" X 6" Bolt-on reversible & replaceable	1/2" X 6" Bolt-on reversible & replaceable
Skid Shoes	Optional	Optional
King Pin	5"	5"
Parking Stand	Standard	Standard

Available Colors:





PULL TYPE BOX BLADE



DIRT DOG

Take a Picture of This QR Code With Your Smart Phone to See it in Action



TRACTOR

FEATURES & BENEFITS

- Tilt or non tilt axle available
- 1/2" bolt on skid plates standard
- 1/2" End plates
- Moldboard overlaps cutting
- Edge angle for super strength

SPECIFICATIONS / OPTIONS

Models	DSP8	DSP10	DSP12
Horsepower Rating	Designed for 70 to 125 tractors	Designed for 70 to 125 tractors	Designed for 70 to 125 tractors
Transport Width	97"	121"	145"
Working Width	96 3/16"	120 3/16"	144 3/16"
Capacity	1 3/4 cu. yds.	2 1/4 cu. yds.	2 3/4 cu. yds.
Weight with Weight Box - Tilt Axle	1525 lbs.	1645 lbs.	1700 lbs.
Weight with Weight Box - No Tilt Axle	1405 lbs.	1525 lbs.	1580 lbs.
Weight of Material in Weight Box	760 lbs.	760 lbs.	760 lbs.
Depth of Box	39"	39"	39"
Dump Clearance	5" below grade	5" below grade	5" below grade
Maximum Tilt Depth to the Right	7"	7 5/8"	8 1/4"
Maximum Tilt Angle	3 1/2"	3 1/2"	3 1/2"
Tongue Construction	4" x 4" x 1/4" tubing	4" x 4" x 1/4" tubing	4" x 4" x 1/4" tubing
Side Plate Construction	3/8" x 24 5/16" high x 39 3/4" deep	3/8" x 24 5/16" high x 39 3/4" deep	3/8" x 24 5/16" high x 39 3/4" deep
Moldboard Construction	1/4" x 24 1/4" high when formed	1/4" x 24 1/4" high when formed	1/4" x 24 1/4" high when formed
Cutting Edge	1/2" x 6" reversible & replaceable	1/2" x 6" reversible & replaceable	1/2" x 6" reversible & replaceable
Max Transport Speed	20 MPH	20 MPH	20 MPH
Lift Cylinder	3 1/2" x 8" ASAE	3 1/2" x 8" ASAE	3 1/2" x 8" ASAE

Available Colors:

